


# IntelliStrobe Safety Systems

4136 S McCann

Springfield, MO. 65804

1-417-883-7720

[www.flaggersafety.com](http://www.flaggersafety.com)

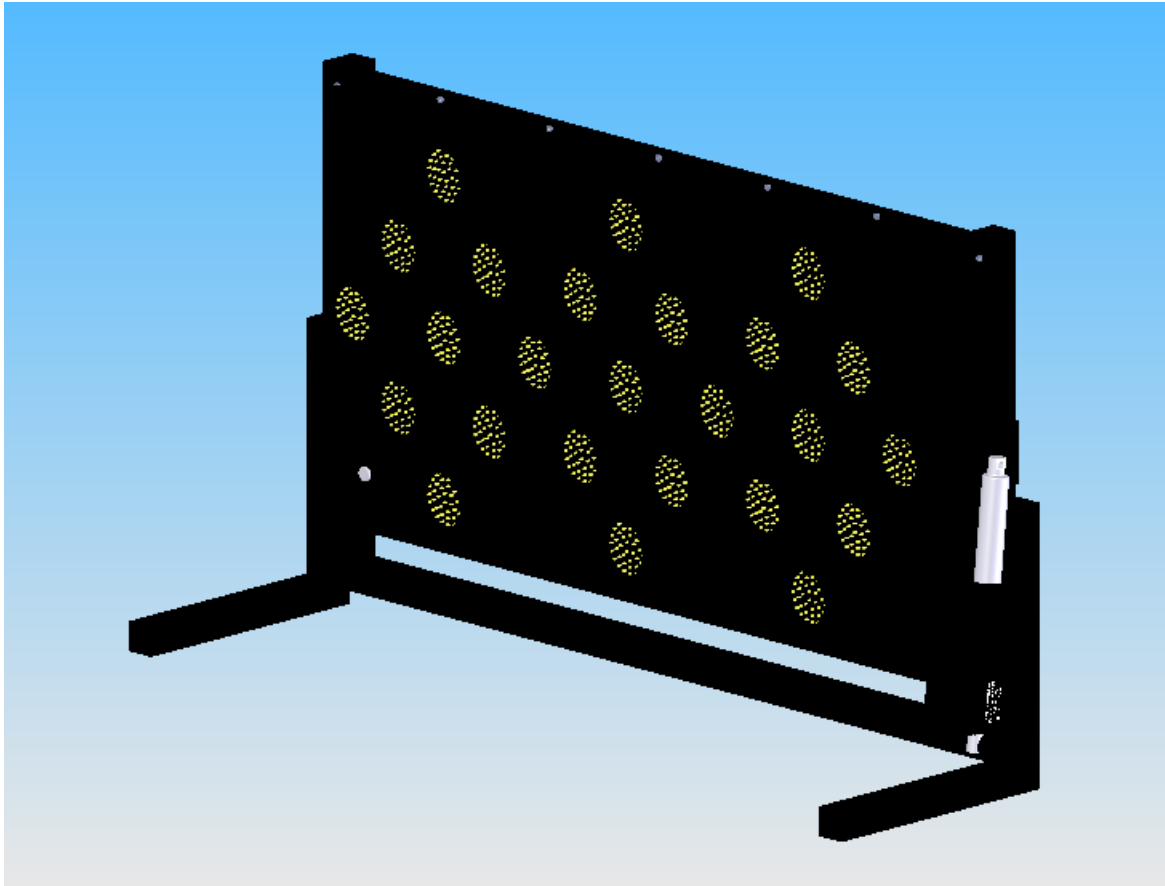

## MODEL AB3060-25P36 WIRELESS ARROW BOARD

# SPECIFICATIONS

## AB3060-25P36

### Sign Panel:

#### Specifications:

Height:	30½"
Length:	60"
Width:	2 9/16"
Material:	.063 Aluminum frame 30½"x60 .063 Aluminum front panel 30½"x60" .063 Aluminum back panel 30½"x60"
Paint:	All powder coated Flat black finish to reduce glare Salt Spray Fog: 1,000 hours UV
Resistance:	500 hours
LED bulbs:	(25) yellow/amber LED's with 360° high impact plastic visor

#### Par 36 LED lamps

Push on type connectors (with means to secure lamp and wiring leads to prevent separation due to vibration during travel and operation.

Mode indicator lamps on backside of panel.

### 25 Light Control:

This model has (4) flashing modes and (2) sequential modes to choose from:

- Single flashing arrow Left
- Single flashing arrow Right
- Progressive chevron Left
- Progressive chevron Right
- Double flashing arrow
- Flashing center bar

### Control Functions:

**Power Button Switch** - Provides power from the 12VDC power to the Arrow Board

**Fuse** - Protects the wiring from damage in the event of a malfunction. To remove the fuse for replacement or inspection, push in on the cap and rotate counterclockwise.

Reverse the procedure to replace cap.

**Mode Selector** – Provides selection of the warning modes.

**Auto Dim** – The auto dimming is controlled through a photocell mounted in the front of each arrow board.